





# Ressorts Springs

## RESSORTS TYPE À COMPRESSION

### SPRINGS COMPRESSION TYPE






#### ACIER / STEEL



# PRD	SPECIFICATIONS						UNIT PACKAGE QUANTITY
	OUTSIDE DIA.	LENGTH OVERALL	GAUGE OF WIRE	TOTAL COILS	*STYLE OF ENDS	FINISH	
5951	1/8"	5/16"	.015"	5	S	BRT.ZINC	25
5952	.128/.133"	.360/.340	.014"	12	SG	PLAIN	25
5953	.140/.147"	.740/.700	.016"	20	SG	PLAIN	25
5954	3/16"	3/8"	.032"	5	S	BLACK OXIDE	25
5955	3/16"	7/16"	.032"	6	S	PLAIN	50
5956	3/16"	33/64"	.029"	9	P	PLAIN	25
5957	7/32"	11/16"	.032"	7	S	BRT.ZINC	25
5958	7/32"	1-3/32"	.013"	25	S	BRT.ZINC	25
5959	7/32"	2-3/8"	.016"	22	S	BRT.ZINC	25
5960	.220"	13/16"	.025"	10-1/4	S	BRT.ZINC	25
5961 ▲	1/4"	3/8"	.025"	5	SG	302 S. STL.	25
5962	1/4"	3/8"	.032"	5	S	BRT.ZINC	50
5963	1/4"	3/4"	.018"	8	S	BRT.ZINC	25
5964	1/4"	15/16"	.015"	13	S	BRT.ZINC	25
5965	1/4"	1"	.013"	11	S	BRT.ZINC	25
5966	1/4"	1-1/2"	.032"	18	S	BRT.ZINC	25
5967	9/32"	1-1/16"	.032"	10	SG	BRT.ZINC	50
5968	9/32"	1-5/8"	.034"	16	S	BRT.ZINC	25
6012	9/32"	1-7/8"	.028"	14	S	BRT.ZINC	25
5969	11/32"	5/8"	.016"	5	S	BRT.ZINC	25
5970	11/32"	11/16"	.016"	5	S	BRT.ZINC	25
5971	11/32"	1-7/32"	.047"	10	SG	BRT.ZINC	25
5972	3/8"	7/8"	.062"	6	SG	BRT.ZINC	50
5973	3/8"	1-7/8"	.034"	16	S	BRT.ZINC	25
5974	25/64"	1-7/32"	.035"	9	SG	BRT.ZINC	25
5975	.400"	.700"	.040"	7	S	BRT.ZINC	100
5976	13/32"	1-1/2"	.047"	10-1/2	S	BRT.ZINC	25
5977	13/32"	1-17/32"	.035"	9	SG	BRT.ZINC	25
5978	27/64"	1"	.039"	7	SG	302 S. STL.	25
5979 ▲	7/16"	3/4"	.047"	5-1/2	S	BRT.ZINC	25
5980	7/16"	15/16"	.054"	7-3/4	S	BRT.ZINC	25
5981	7/16"	2-1/4"	.062"	14	SG	BRT.ZINC	10
5982	7/16"	2-1/2"	.035"	18	S	PLAIN	25
5983	7/16"	7-3/4"	.054"	48-1/4	S	BRT.ZINC	10
5984	15/32"	1"	.047"	8	S	BRT.ZINC	10
5985	15/32"	1-1/2"	.062"	8	SG	BRT.ZINC	25
5986	.480"	1"	.055"	5	S	302 S. STL.	25
5987	.490"	.720"	.062"	6-3/4	S	BRT.ZINC	100
5988 ▲	1/2"	7/8"	.047"	5	S	BRT.ZINC	25
5989	1/2"	3-1/8"	.041"	22	S	BRT.ZINC	10
5990	17/32"	4"	.072"	28	SG	PLAIN	25
5991	35/64"	7/8"	.105"	6	SG	PLAIN	10
5992	19/32"	9/16"	.054"	3-1/2	S	BRT.ZINC	25
5993	5/8"	1-3/8"	.062"	7-1/2	S	BRT.ZINC	25
5994	5/8"	1-3/8"	1.00"	7	S	BRT.ZINC	10
5995	5/8"	2"	.105"	10	SG	BRT.ZINC	25
5996	5/8"	3"	.080"	15	SG	BRT.ZINC	10
6011	11/16"	27/32"	.054"	5	S	BRT.ZINC	25
5997	11/16"	2"	.092"	10	SG	BRT.ZINC	25
5998	.707"	1"	.041"	5	SNG	PLAIN	25
5999	.720"	2"	.067"	8	SG	302 S. STL.	10
5700	.733"	1"	.054"	5	SNG	PLAIN	25
5701 ▲	3/4"	13/16"	.1875"	3	SG	PLAIN	10
6010	7/8"	2"	.054"	7	SG	BRT.ZINC	10
5702	1"	1-15/16"	.062"	6-1/4	S	BRT.ZINC	10
5703	1-3/32"	1-1/2"	.054"	7	SG	BRT.ZINC	10

▲ 302 Acier inoxydable / 302 Stainless Steel


#### \*EXPLICATION DES STYLES D'EXTRÉMITÉS / STYLE ENDS EXPLANATION



### RESSORTS - TYPE À COMPRESSION - LONGUEUR UNIVERSELLE

### SPRINGS - COMPRESSION TYPE - UNIVERSAL LENGHT

ACIER / STEEL



# PRD	SPECIFICATIONS						UNIT PACKAGE QUANTITY
	OUTSIDE DIA.	LENGTH OVERALL	GAUGE OF WIRE	TOTAL COILS	*STYLE OF ENDS	FINISH	
5750	11/64"	11"	.026"	19.5	P	BL.JAPAN	10
5751	7/32"	11-1/2"	.041"	12	S	ZINC	10
5752	15/64"	11"	.032"	14.6	P	BL.JAPAN	10
5753	5/16"	11-1/2"	.047"	10	S	ZINC	10
5754	3/8"	10"	.047"	8	S	ZINC	10
5755	3/8"	11-1/2"	.047"	8	S	BL.JAPAN	10
5756	7/16"	11"	.080"	8	P	BL.JAPAN	10
5757	15/32"	11"	.062"	7.3	P	BL.JAPAN	10
5758	1/2"	11-1/2"	.062"	6	S	ZINC	10
5759	9/16"	11"	.062"	5.5	P	BL.JAPAN	10
5760	9/16"	11"	.092"	6.3	P	BL.JAPAN	10
5761	5/8"	11"	.062"	4.8	P	BL.JAPAN	10
5762	5/8"	10"	.062"	6	S	ZINC	10
5763	5/8"	10"	.080"	6	S	ZINC	10
5764	11/16"	10"	.062"	3.5	S	ZINC	10
5765	11/16"	11"	.092"	5	P	BL.JAPAN	10
5766	23/32"	11"	.062"	3.8	P	BL.JAPAN	10
5767	47/64"	11"	.105"	4.7	P	BL.JAPAN	10
5768	3/4"	10"	.091"	3.5	S	ZINC	10
5769	27/32"	11"	.080"	3.5	P	BL.JAPAN	10
5770	7/8"	10"	.080"	3	S	ZINC	10
5771	7/8"	11"	.092"	3.5	P	BL.JAPAN	10
5772	7/8"	11"	.105"	3.8	P	BL.JAPAN	10
5773	31/32"	11"	.080"	2.8	P	BL.JAPAN	10
5774	1-1/16"	11"	.120"	3	P	BL.JAPAN	10
5775	1-3/16"	11"	.092"	2.2	P	BL.JAPAN	10
5776	1-3/16"	11"	.120"	2.5	P	BL.JAPAN	10

### RESSORTS - TYPE À EXTENSION - STYLE UNIVERSEL / SPRINGS - EXTENSION TYPE - UNIVERSAL STYLE

# PRD	SPECIFICATIONS					UNIT PACKAGE QUANTITY
	OUTSIDE DIA.	LENGTH OVERALL	LENGTH OF COIL	GAUGE OF WIRE	FINISH	

#### RESSORTS À EXTENSION - STYLE UNIVERSEL / EXTENSION SPRINGS - UNIVERSAL STYLE



5777	9/32"	6"	1-7/8"	.054"	ZINC	10
5778	3/8"	5"	9/16"	.041"	BLACK	10
5779	13/32"	9-3/8"	1-7/8"	.041"	BLACK	10
5780	7/16"	6"	1-1/16"	.054"	BLACK	10
5781	7/16"	9-1/2"	3-1/4"	.047"	BLACK	10
5782	1/2"	9-1/4"	3-1/4"	.047"	BLACK	10
5783	35/64"	7-1/4"	1-3/8"	.062"	BLACK	10
5784	9/16"	7-1/4"	1-1/4"	.062"	BLACK	10
5785	9/16"	9-1/4"	3-1/4"	.054"	BLACK	10

#### RESSORTS À EXTENSION / EXTENSION SPRINGS

Bouts standard, sans crochets ni anneaux / Plain ends, without hooks or loops





5786	1/4"	11"		.020"	BLACK	10
5787	1/4"	11"		.026"	BLACK	10
5788	1/4"	11"		.032"	BLACK	10
5789	5/16"	11"		.026"	BLACK	10
5790	5/16"	11"		.032"	BLACK	10
5791	3/8"	11"		.032"	BLACK	10
5792	5/8"	11"		.062"	BLACK	10
5793	3/4"	11"		.062"	BLACK	10
5794	3/4"	11"		.105"	BLACK	10
5795	1"	11"		.092"	BLACK	10
5796	1"	11"		.105"	BLACK	10

### RESSORTS - TYPE À EXTENSION

### SPRINGS - EXTENSION TYPE

ACIER / STEEL

	# PRD	SPECIFICATIONS					UNIT PACKAGE QUANTITY
		OUTSIDE DIA.	LENGTH OVERALL	GAUGE OF WIRE	*END LOOPS	FINISH	
	5704	3/32"	1/2"	.014"	SC	BRT.ZINC	25
	5705	1/8"	5/8"	.018"	SC	BRT.ZINC	25
	5706	5/32"	1-5/16"	.018"	SSL	BRT.ZINC	25
	5707	5/32"	4-9/32"	.018"	SC	BRT.ZINC	10
	5708	5/32"	84"	.035"	HC,SC	PLAIN	10
	5709	3/16"	1"	.022"	SC	BRT.ZINC	25
	5710	3/16"	7-1/4"	.025"	DS	BLACK	10
	5711	7/32"	1-1/4"	.028"	SSL	BRT.ZINC	25
5712	7/32"	2"	.025"	SSL	BRT.ZINC	25	
	6007	7/32"	9"	.031"	DS	BLACK	10
	5714	1/4"	1"	.022"	SC	BRT.ZINC	25
	5715	1/4"	2-1/2"	.024"	SC,SS	BRT.ZINC	25
	5716	1/4"	1-13/16"	.025"	SC	PLAIN	25
	5717	1/4"	5-3/4"	.025"	DC	BLACK	10
	5718	9/32"	1"	.031"	SC	PLAIN	25
	5719	9/32"	5-1/4"	.041"	DC	BLACK	10
	6005	9/32"	6-5/8"	.034"	DC	BLACK	10
	5721	5/16"	1-9/32"	.023"	SSL	BRT.ZINC	25
	5722	5/16"	6-3/4"	.047"	DC	BLACK	10
	5723	11/32"	5-1/2"	.047"	DC	BLACK	10
	6009	11/32"	8-3/8"	.047"	DC	BLACK	10
	5725	3/8"	1-5/8"	.054"	SC	BRT.ZINC	10
	5726	3/8"	10"	.054"	DC	BLACK	10
	5727	13/32"	3-13/16"	.047"	SSL	BRT.ZINC	10
	5728	7/16"	2"	.041"	SSL	BLACK	25
	5729	7/16"	5-3/8"	.062"	DC	BLACK	10
	5730	7/16"	6-3/8"	.047"	DC	ZINC	10
	6006	7/16"	9"	.062"	DC	BLACK	10
	5732	1/2"	2"	.058"	HC	BLACK	100
	5733	1/2"	3"	.058"	HC	BLACK	100
	5800	1/2"	4"	.058"	HC	PLAIN	100
	5735	1/2"	2"	.072"	HC	PLAIN	100
	5736	1/2"	3"	.072"	HC	PLAIN	100
	5737	1/2"	4"	.072"	HC	PLAIN	100
	5738	1/2"	4-7/8"	.072"	DC	ZINC	10
	5739	1/2"	5-1/2"	.047"	SS	PLAIN	10
	5740	1/2"	6"	.062"	HC	PLAIN	10
	5741	1/2"	3"	.072"	SC	PLAIN	10
	5742	9/16"	1-5/8"	.062"	HC	BRT.ZINC	25
	5743	9/16"	3-5/8"	.062"	HC	PLAIN	10
	5744	9/16"	5-1/4"	.080"	DC	BLACK	10
	6008	9/16"	9"	.080"	DC	ZINC	10
	5746	5/5"	3"	.080"	DC	PLAIN	25
	6004	5/8"	9"	.080"	DC	BLACK	10
	5748	23/32"	16"	.109"	SS	BRT.ZINC	10
	5749	13/16"	9"	.080"	DC	BLACK	10



\*SSL Single Loop on Side at Inward Angle of 45°  
\*HC Hook, Centred. \*HS Hook, on Side.  
\*LLC Long Loop Centred


5707 (Grandeur nature / Actual size)





**RESSORTS - TYPE À EXTENSION**  
**SPRINGS - EXTENSION TYPE**


PLAQUÉ ZINC / ZINC PLATED

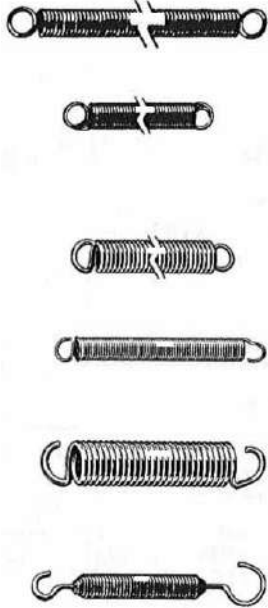

# PRD	SPECIFICATIONS				APPROX.LBS LOAD REFERENCE EXT	UNIT PACKAGE QUANTITY
	O.D.	LENGTH OVERALL	WIRE SIZE	LBS RATE/ INCH		
5902	.625"	10"	.072"	2.1	8.8 @ 13"	5
5903	.500"	10"	.062"	1.8	10.2 @ 12"	5
5904	.438"	6.438"	.048"	1.1	4.2 @ 8.437"	5
5905	.328"	6.500"	.035"	7.5 OZ	2.2 @ 8.500"	5
5906	.547"	5.625"	.080"	10.0	24 @ 7.625"	5
5907	.250"	5.750"	.028"	7 OZ	1.6 @ 7.750"	5
5908	.375"	3.250"	.041"	1.9	5.2 @ 5.250"	5
5909	.250"	4.00"	.028"	13 OZ	1.9 @ 6.00"	5
5910	.484"	4.500"	.063"	6.2	14 @ 6.500"	5
5911	.734"	4.062"	.062"	1.4	4.3 @ 6.062"	5
5912	.719"	4.00"	.105"	12.5	36.5 @ 5.00"	5
5913	.531"	5.250"	.062"	5.0	8.5 @ 6.250"	10
5914	.750"	2.594"	.105"	46	29.5 @ 2.968"	5
5915	.750"	2.656"	.080"	10.3	12.5 @ 3.656"	5
5917	.344"	1.438"	.048"	15.0	10 @ 1.812"	10
5919	.234"	1.125"	.020"	12.0	9 OZ @ 1.625"	10

**RESSORTS - TYPE À COMPRESSION**  
**SPRINGS - COMPRESSION TYPE**


PLAQUÉ ZINC / ZINC PLATED



# PRD	SPECIFICATIONS					UNIT PACKAGE QUANTITY
	O.D.	LENGTH OVERALL	WIRE SIZE	APPROX. SOLID HT.	LBS.RATE/INCH	
5922	.875"	10.00"	.080"	3.00"	3.2	5
5930	.875"	3.062"	.092"	1.098"	21.5	5
5933	.625"	2.844"	.080"	1.080"	30.0	5
5934	.590"	2.193"	.040"	.380"	3.1	20
5939	.375"	.781"	.042"	.378"	7.4	20
5940	.438"	2.625"	.048"	.950"	6.0	10
5941	.500"	2.500"	.063"	1.00"	18.0	10

**RESSORTS - UNIVERSEL**  
**SPRINGS - UNIVERSAL**

GALVANISÉ / GALVANIZED

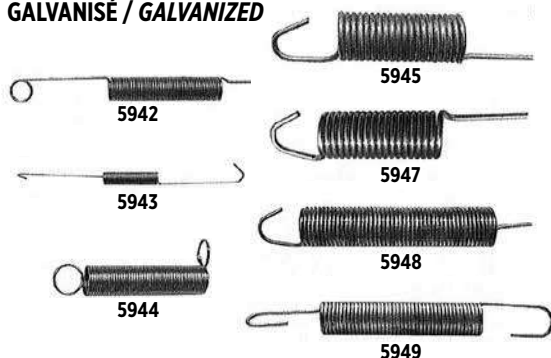

# PRD	SPECIFICATIONS				UNIT PACKAGE QUANTITY
	O.D.	LENGTH OVERALL	WIRE SIZE	COIL LENGHT	
5942	13/32"	11-1/2"	1/32"	1-7/8"	10
5943	1/2"	4-3/8"	1/16"	2-1/2"	10
5944	3/8"	1-13/16"	1/32"	1-1/2"	10
5945	3/4"	8-1/2"	3/32"	1-7/8"	10
5946	25/32"	5-3/4"	3/64"	2-3/8"	10
5947	13/16"	18-1/2"	3/32"	2"	10
5948	3/4"	17-1/2"	1/16"	3-1/2"	10
5949	7/16"	8-1/4"	1/16"	2"	10

**CONTACTEZ-NOUS  
GET IN TOUCH**

**1 800 463-5259**

**info@prdistribution.ca**

**Notre service, toujours en tête.<sup>MD</sup>      Our service, one step ahead.<sup>TM</sup>**

prdistribution.ca

1 800 463-5259

info@prdistribution.ca

Siège social • Head Office

6500, rue Zéphirin-Paquet

Québec QC G2C 0M3

T 418 872-6018 F 418 872-6583

Succursale • Branch

1100, rue de la Manic

Saguenay QC G7K 1A2

T 418 545-1100 F 418 545-1104

